Hinged corrugated mailer

Nominal crease spans: 74 × 50 × 20 mm. Trial stock: E-flute, approximately 1.5 mm thick.

Cut Score / fold

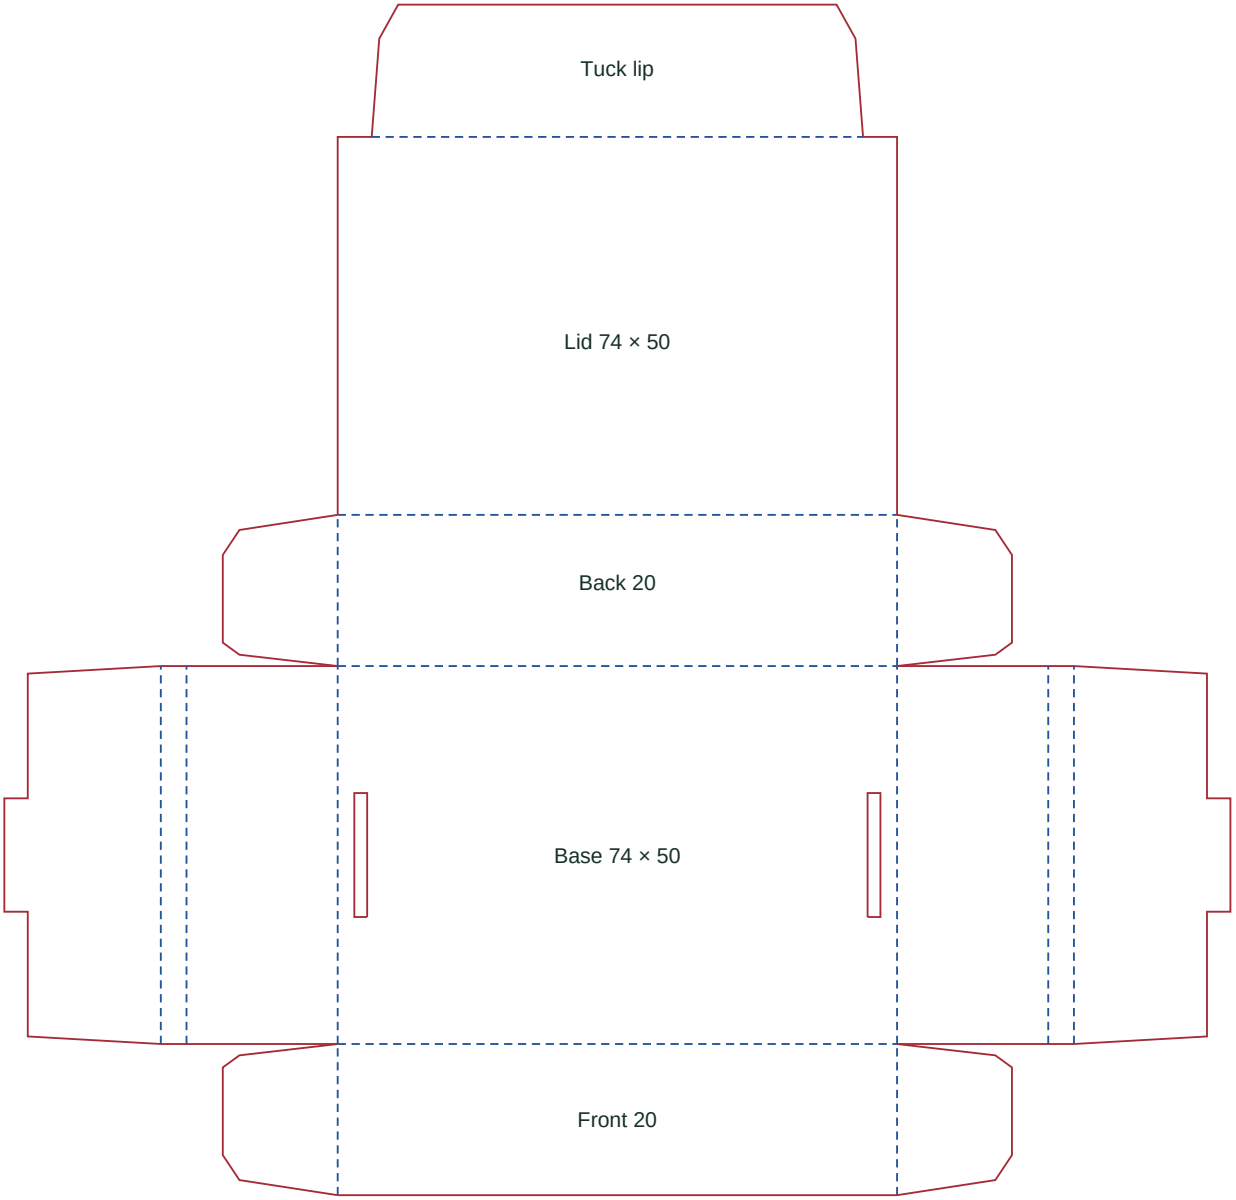

Mockup assembly

1. Cut the outside contour and remove the two narrow slot centers. Score dashed lines gently.
2. Raise front and back walls. Turn their four corner wings inward along the sides.
3. Roll side walls over the wings. Seat each tongue in its base slot, then close the lid and tuck the lip inside.

Crease width and tab clearance change with flute thickness. Test on the intended board before tooling.

50 mm print check